

ESTCP Cost and Performance Report

(EW-201248)



Solar Cogeneration of Electricity and Hot Water at DoD Installations

June 2014



ESTCP

ENVIRONMENTAL SECURITY
TECHNOLOGY CERTIFICATION PROGRAM

U.S. Department of Defense

This report was prepared under contract to the Department of Defense Strategic Environmental Research and Development Program (SERDP). The publication of this report does not indicate endorsement by the Department of Defense, nor should the contents be construed as reflecting the official policy or position of the Department of Defense. Reference herein to any specific commercial product, process, or service by trade name, trademark, manufacturer, or otherwise, does not necessarily constitute or imply its endorsement, recommendation, or favoring by the Department of Defense.

REPORT DOCUMENTATION PAGE				<i>Form Approved</i> OMB No. 0704-0188	
<small>The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.</small> PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.					
1. REPORT DATE (DD-MM-YYYY) May 2014		2. REPORT TYPE Cost and Performance Report		3. DATES COVERED (From - To) 04/09/2012 - 09/17/2014	
4. TITLE AND SUBTITLE ESTCP COST AND PERFORMANCE REPORT Solar Cogeneration of Electricity and Hot Water at DoD Installations				5a. CONTRACT NUMBER W912HQ-12-C-0053	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S) Ratson Morad				5d. PROJECT NUMBER EW-201248	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Cogenra Solar, Inc. 365 E. Middlefield Rd. Mountain View, CA 94043				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) Environmental Security Technology Certification Program 4800 Mark Center Drive Suite 17D03 Alexandria, VA 22350				10. SPONSOR/MONITOR'S ACRONYM(S) ESTCP	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT DISTRIBUTION A. Approved for public release: distribution unlimited.					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT <p>The objective of this project was to demonstrate an innovative hybrid electric/thermal solar cogeneration system, document performance and cost advantages, and develop financing models and engineering tools to expedite transfer of the technology widely across DoD facilities. The demonstration project included the installation of systems at five separate buildings. The electricity and thermal energy delivered by these systems was measured for one year, and the systems continue to operate. Lifecycle cost analysis demonstrated that the systems offer a payback period of 5.1 years, one half to two thirds the payback time of photovoltaics (PV) or solar hot water (SHW). The results of the project demonstrated the increased value of cogeneration, enabling accelerated and cost-effective compliance with the DoD's energy and environmental goals. Operation and maintenance requirements have been similar to PV or SHW and the systems continue to operate successfully.</p>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT SAR	18. NUMBER OF PAGES 40	19a. NAME OF RESPONSIBLE PERSON Dr. Anne Andrews
a. REPORT	b. ABSTRACT	c. THIS PAGE			19b. TELEPHONE NUMBER (Include area code) 571-372-6565

Reset

COST & PERFORMANCE REPORT

Project: EW-201248

TABLE OF CONTENTS

	Page
EXECUTIVE SUMMARY	ES-1
1.0 INTRODUCTION	1
1.1 BACKGROUND	1
1.2 OBJECTIVE OF THE DEMONSTRATION	1
1.3 REGULATORY DRIVERS	2
2.0 TECHNOLOGY DESCRIPTION	5
2.1 TECHNOLOGY OVERVIEW	5
2.2 ADVANTAGES AND LIMITATIONS OF THE TECHNOLOGY	6
3.0 PERFORMANCE OBJECTIVES	9
4.0 FACILITY/SITE DESCRIPTION	13
4.1 FACILITY/SITE LOCATION AND OPERATIONS	13
4.2 FACILITY/SITE CONDITIONS	14
5.0 TEST DESIGN	17
5.1 CONCEPTUAL TEST DESIGN	17
5.2 BASELINE CHARACTERIZATION	19
5.3 DESIGN AND LAYOUT OF TECHNOLOGY COMPONENTS	20
5.4 OPERATIONAL TESTING	22
5.5 SAMPLING PROTOCOL	23
5.6 SAMPLING RESULTS	23
6.0 PERFORMANCE ASSESSMENT	25
7.0 COST ASSESSMENT	33
7.1 COST MODEL	33
7.2 COST DRIVERS	33
7.3 COST ANALYSIS AND COMPARISONS	34
8.0 IMPLEMENTATION ISSUES	37
9.0 REFERENCES	39
APPENDIX A POINTS OF CONTACT	A-1

LIST OF FIGURES

	Page
Figure 1.	Cogenra’s SunDeck system configured for roof-mounted applications. 5
Figure 2.	Port Hueneme plan view. 13
Figure 3.	PRFTA plan view. 14
Figure 4.	Hot water usage per day at Port Hueneme, Building 61. 20
Figure 5.	Daily hot water usage profiles, for Port Hueneme, Building 61. 20
Figure 6.	Typical system configuration. 21
Figure 7.	System components, front and back sides. 21
Figure 8.	Project schedule, including all phases of operation and testing. 22
Figure 9.	Example of two days of 5-minute sampling data as viewed using one of Cogenra’s proprietary in-house data tools. 24
Figure 10.	Cogenra system PV and thermal energy output per square meter per day, along with reference PV and SHW systems, for Port Hueneme Galley. 25
Figure 11.	Cogenra system PV and thermal energy output per square meter per day, along with reference PV and SHW systems, for Port Hueneme Barracks 1481. 25
Figure 12.	Daily maximum solar-loop fluid temperatures at PRFTA Barracks. 27
Figure 13.	Electrical and thermal output for a SunDeck row at PRFTA Barracks, clearly showing the impact of low or inconsistent hot water usage. 28
Figure 14.	Lifecycle GHG emissions analysis performed by Life Cycle Associates. 29

LIST OF TABLES

	Page
Table 1.	Performance objectives. 10
Table 2.	Summary of typical hot water usage in gallons/day (GPD) as measured for each building. 19
Table 3.	List of measurements. 23
Table 4.	Monthly output table for Port Hueneme Bldg 1481 (Barracks). 26
Table 5.	Monthly output table for Port Hueneme Bldg 61 (Galley). 26
Table 6.	Summary of energy output versus reference PV array. 27
Table 7.	Summary of energy economic value versus reference PV and SHW arrays. 28
Table 8.	GHG emissions offset by the Cogenra SunDeck demonstration system, and compared to reference PV and SHW arrays. 30
Table 9.	Lifecycle costs and payback comparison of Solar cogeneration versus reference PV and SHW. 30
Table 10.	Project cost table. 33
Table 11.	System size and performance for cost analysis. 34
Table 12.	Assumptions for cost analysis. 34
Table 13.	Financial analysis for Cogenra's rooftop solar cogeneration system. 35
Table 14.	Sensitivity of system payback to various site-specific parameters. 36

ACRONYMS AND ABBREVIATIONS

AC	alternating current
BEQ	Bachelor Enlisted Quarters
CO ₂ e/yr/m ²	average CO ₂ saved per year
CPV	concentrating photovoltaic
CSI	California Solar Initiative
DC	direct current
DNI	direct normal irradiance
DoD	U.S. Department of Defense
EISA	Energy Independence Security Act
EO	Executive Order
ESTCP	Environmental Security Technology Certification Program
FY	fiscal year
GHG	greenhouse gas
GPD	gallons per day
HPPA	heat and power purchase agreement
iBOS	integrated balance of systems
ITC	investment tax credit
kWh/m ² /day	kilowatt hours per square meter per day
kWh/m ² /year	kilowatt hours per square meter per year
LCA	Life Cycle Associates
MACRS	Modified Accelerated Cost Recovery System
MT	millions of tons
NBVC	Naval Base Ventura County
NEMA	National Electric Manufacturers Association
NGA	nondisclosure agreement
NREL	National Renewable Energy Laboratory
O&M	operation and maintenance
PPA	power purchase agreement
PRFTA	Parks Reserve Force Training Area

ACRONYMS AND ABBREVIATIONS (continued)

psf	pounds per square foot
PV	photovoltaic
PVT	photovoltaic-thermal
SHW	solar hot water
SOP	standard operating procedure
SWC	Special Warfare Command
XLS	Microsoft Excel Spreadsheet

ACKNOWLEDGEMENTS

We would like to thank Dr. Jeff Marqusee and Dr. James Galvin from ESTCP, as well as Mr. Peter Knowles and Ms. Jane Dudik, the support team.

*Technical material contained in this report has been approved for public release.
Mention of trade names or commercial products in this report is for informational purposes only;
no endorsement or recommendation is implied.*

This page left blank intentionally.

EXECUTIVE SUMMARY

Cogenra Solar, Inc. set out to do the following: demonstrate an innovative hybrid electric/thermal solar cogeneration system at Port Hueneme (Naval Base Ventura County) and the Parks Reserve Forces Training Area (PRFTA) (Dublin, CA); validate and document performance and cost advantages; and develop financing models and engineering tools to expedite transfer of the technology widely across Department of Defense (DoD) facilities.

Cogenra's approach combines proven photovoltaic (PV) and solar hot water (SHW) technologies into a single integrated solar cogeneration system that extracts as much of the sun's incident power as possible, as high-value electricity and delivers the rest as useful heat. Cogenra's SunDeck solar collectors are water-cooled concentrating PV (CPV) parabolic troughs that capture rather than dissipate what other PV approaches call "waste heat." The architecture comprises a series of ground or roof-mounted arrays that independently track the sun along one axis. Within each array, a series of flat mirrors concentrate sunlight (~8X) onto silicon-based PV-Thermal (PVT) panels that generate electricity. Conduits in the receiver panel carry a water-glycol mixture in a closed loop that cools the PV cells, enhancing their performance, and capturing the excess solar energy as heat. A compact SHW heat exchange/storage system transfers the heat to preheat the domestic water supply before it enters the site's pre-existing hot water heater.

The demonstration project included the installation of Cogenra systems at five separate buildings; three at Port Hueneme and two at PRFTA. The electricity and thermal energy delivered by these systems was measured for 1 year, and the systems continue to operate. The project set out to demonstrate that compared to standard PV and SHW arrays of the same size, Cogenra's system achieves the following:

- 1) Generates at least 4.75X as much renewable energy (electricity + heat);
- 2) Delivers 2X the economic value;
- 3) Reduces greenhouse gas (GHG) emissions by 2.6X versus PV and by 1.3X versus SHW;
- 4) Pays back the initial investment in energy cost savings in less time;
- 5) Accelerates compliance with DoD energy and environmental goals ~2X; and
- 6) Requires minimal operation and maintenance, comparable to PV and SHW.

The SunDeck demonstration systems performed well and delivered over 4X the renewable energy as a reference PV array, 1.7X the economic value as a reference PV array, and 1.4X the value of a reference SHW array. These gains were somewhat less than the stated performance goals, primarily due to inconsistent hot water usage in some of the buildings, especially the barracks. Similarly, the Cogenra systems demonstrated greater GHG emissions reduction than PV or SHW, though slightly less than the target amount due to system utilization. Low or inconsistent hot water demand limits the utilization of the cogeneration system overall, but especially the amount and value of the heat delivered. When there is low demand for the thermal energy collected by the solar array, the solar thermal storage tank heats up and eventually reaches its upper temperature limit, which triggers the array to de-track to avoid overheating. When de-tracked the array produces neither electricity nor hot water, impacting the economics of the project. In cases where hot water demand is inadequate, Cogenra's system architecture can be configured to cheaply dissipate some or all of the captured heat.

Lifecycle cost analysis demonstrated that the Cogenra systems offer a payback period of 5.1 years, $\frac{1}{2}$ to $\frac{2}{3}$ the payback time of PV or SHW. The results of the project demonstrated the increased value of cogeneration, enabling accelerated and cost-effective compliance with the DoD's energy and environmental goals. Operation and maintenance requirements have been similar to PV or SHW and the systems continue to operate successfully.

1.0 INTRODUCTION

Over the next two decades The Department of Defense (DoD) intends to dramatically increase its usage of renewable energy. This is part of a concerted effort to reduce life-cycle costs and greenhouse gas (GHG) emissions.

This project has demonstrated the ability of Cogenra Solar's SunDeck system to generate significantly more renewable energy, energy value, and GHG reductions compared to the widely available solar photovoltaic (PV) and solar hot water (SHW) technologies, while also reducing cost.

1.1 BACKGROUND

Cogenra's approach combines proven PV and SHW technologies into a single integrated solar cogeneration system that extracts as much of the sun's incident power as possible as high-value electricity and delivers the rest as useful heat. By sharing equipment and installation costs across the PV and SHW roles, Cogenra's approach can generate substantially more renewable energy at relatively low incremental cost over PV or SHW alone, yielding far more attractive economics.

Conventional PV systems convert less than 20% of the sun's incident energy into electricity and struggle to dissipate the remaining 80+% as heat. Low efficiency requires large systems to generate a significant amount of renewable energy and contributes to PV's further struggle to achieve cost parity with the grid. These issues severely limit the number of cost-effective deployment opportunities at DoD facilities. Conventional SHW systems are mandated by the Energy Independence Security Act (EISA) §523 (strengthened by recent DoD directives¹) but suffer from even longer payback times than PV.²

1.2 OBJECTIVE OF THE DEMONSTRATION

Cogenra Solar, Inc. set out to achieve the following: demonstrate an innovative hybrid electric/thermal solar cogeneration system at Port Hueneme (Naval Base Ventura County) and the Parks Reserve Forces Training Area (PRFTA) (Dublin, CA); validate and document performance

¹ EISA §523 requires that "If lifecycle cost-effective, as compared to other reasonably available technologies, not less than 30% of the hot water demand for each new Federal building or Federal building undergoing a major renovation be met through the installation and use of solar hot water heaters." The Army has restricted the qualifier clause and now requires that "**all** new construction projects with an average daily non-industrial hot water requirement of 50 gallons or more, and located in an area...receiving an annual average of 4 kilowatt hours per square meter per day (kWh/m²/day) or more **will be** designed to provide a minimum of 30% of the facility's hot water demand by solar water heating. Waste heat harvesting, integrated co-generation systems, or a combination thereof may be used in lieu of solar water heating where they achieve equivalent energy savings." (emphasis added) Source: Army Memorandum on Sustainable Design and Development Policy Update (Environmental and Energy Policy) dated October 27, 2010, and signed by Katherine Hammack, Assistant Secretary of the Army (Installations, Energy, Environment).

² The U.S. Army Corps of Engineers has concluded that conventional solar hot water is rarely cost-effective over its life cycle unless implemented in a district wide configuration, and even then it generally has a long payback time, typically much longer than 20 years. District wide heating is not always possible and by increasing minimum project scope may hinder implementation in many cases. Source: A. Zhivov, Central Solar Hot Water Systems Design Guide (Draft), U.S. Army Corps of Engineers (2011).

and cost advantages; and develop financing models and engineering tools to expedite transfer of the technology widely across DoD facilities.

In order to measure the baseline hot water usage profile of the building comprising the demonstration project, Cogenra and subcontractors installed hot water meters that measure flow and temperature at each building. Utilizing these water meters, Cogenra tracked for a full year the hot water consumption profile of all buildings involved with the project. The objective of this baseline metering was to aid in the calculation of cost savings and GHG reductions brought about by the cogeneration system.

The demonstration project included the installation of Cogenra systems at five separate buildings, three at Port Hueneme and two at PRFTA. The electricity and thermal energy delivered by these systems was measured for 1 year, and the systems continue to operate. The renewable energy delivered, traditional energy usage offset, and the corresponding economic benefits were the data used to demonstrate the key performance and cost advantages of the cogeneration system.

The project has demonstrated that Cogenra's system delivers more renewable energy, cost savings and GHG emissions reductions than standard PV or SHW arrays of the same size. The specific objectives of the demonstration are detailed in Section 3, Performance Objectives.

A further goal of the demonstration project was to expedite technology transfer to, and wide adoption within, the DoD. The project objectives therefore included guidance documentation and other deliverables to ease and expedite solar cogeneration technology transfer. The demonstration sites were selected with high visibility as a priority to facilitate technology transfer to follow-on sites.

Additional benefits of Cogenra's solar cogeneration system are the engineering and design jobs at Cogenra's headquarters in California and manufacturing jobs at suppliers throughout the US. With the demonstration complete, the DoD now has five operational solar cogeneration systems that will continue to provide renewable electricity and hot water for more than 20 years.

1.3 REGULATORY DRIVERS

The DoD aims to "produce or procure 18.3% of all energy consumed within its facilities during fiscal year (FY) 2020 from renewable energy sources (thermal as well as electrical),"³ and the 2010 National Defense Authorization Act §2852 mandates 25% by FY2025. DoD has further committed to reduce GHG emissions from Scope 1 and 2 sources (controlled by DoD or resulting from energy purchased by DoD) by 34% by FY2020 relative to FY2008. EISA §523 also requires that "If lifecycle is cost-effective, as compared to other reasonably available technologies, not less than 30% of the hot water demand for each new Federal building or Federal building undergoing a major renovation be met through the installation and use of solar hot water heaters." Executive Order (EO) 13423 §2(b) emphasizes new renewable sources and implementation of renewable energy projects on federal land.

³ Department of Defense Strategic Sustainability Performance Plan FY 2010.

Achieving these ambitious renewable energy and GHG goals on schedule will require maximum utilization of solar power generation opportunities. Solar cogeneration will enable DoD to achieve its goals faster by: (1) creating many more deployment opportunities that are cost-effective, and (2) delivering greater energy benefits, energy security benefits, economic benefits, and GHG benefits for each new project commissioned.

This page left blank intentionally.

2.0 TECHNOLOGY DESCRIPTION

2.1 TECHNOLOGY OVERVIEW

Cogenra's solar collectors are water-cooled concentrating PV (CPV) parabolic troughs that capture rather than dissipate what other PV approaches call "waste heat." The architecture comprises a series of ground or roof-mounted arrays that independently track the sun along one axis. Within each array, a series of flat mirrors concentrate sunlight (~8X) onto silicon-based PV-Thermal (PVT) panels that generate electricity. Conduits extruded directly through the panel substrate carry a water-glycol mixture in a closed loop that cools the PV cells, enhancing their performance, and capturing the excess solar energy as heat. A compact SHW heat exchange/storage system transfers the heat to preheat the domestic water supply before it enters the site's pre-existing hot water heater.

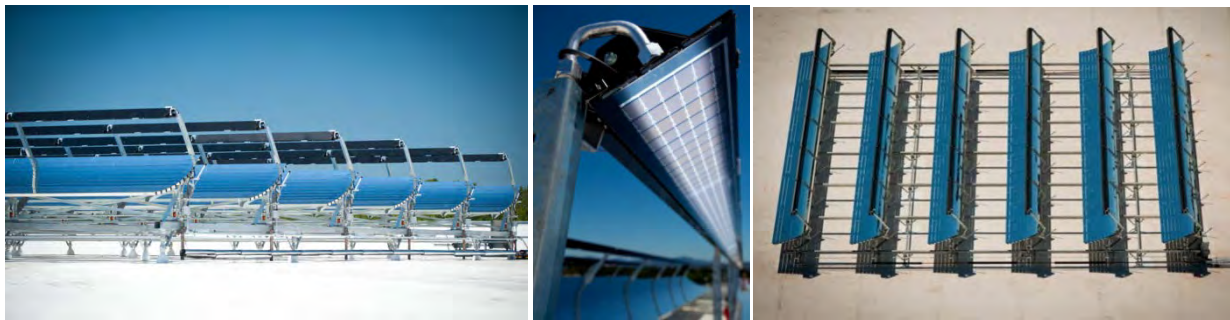


Figure 1. Cogenra's SunDeck system configured for roof-mounted applications.
Shown above is a system at General Hydroponics in Santa Rosa, CA.

Each roof-mounted SunDeck module comprises one half-parabola that focuses onto a single PVT panel mounted above the mirrors along the focus line. The module axis can be oriented in any orientation, and the module pivots around that axis to track the sun. This configuration enables a much lower profile, lower wind loading, and lighter weight (5 pounds per square foot [psf] total) than the ground-mounted SunBase. A SunDeck module can be mounted on roofs or on the ground and the axis can be oriented in any direction, as appropriate to the particular installation.

This Environmental Security Technology Certification Program (ESTCP) project included some technology development work prior, and in addition, to the actual field demonstration project. Specifically, this included the Cogenra integrated balance of systems (iBOS) and monitoring software.

The Cogenra SunDeck iBOS was developed to combine balance of systems and controls for the cogeneration system into a single package. The iBOS includes:

- PV direct current (DC)-alternating current (AC) inverter;
- hydronics components including the pump, fluid temperature sensors, pressure relief valve, and the other necessary valves and connections;
- electrical power and field connections;

- SunDeck system control board and communication connection; and
- National Electric Manufacturers Association (NEMA) 4X enclosure.

Integrating all of these components and functions into a single unit streamlines manufacturing and simplifies system installation, both of which reduce the installed cost of the system. The iBOS also enables the monitoring system to communicate with all sensors and actuators in the array.

Cogenra developed software that allows a system owner or operator to buy an option to monitor the performance of the SunDeck system through a web interface. To access the data for the SunDeck systems that they own or operate, the user must enter their login credentials on Cogenra's monitoring site. The user can monitor the electrical and thermal energy delivered by the system on a monthly, daily, or hourly basis. The monitoring site also allows for downloading the data in Microsoft Excel Spreadsheet (XLS) format.

Cogenra has also developed additional monitoring software tools that access more detailed data from all sensors on the SunDeck system, although these additional monitoring tools are beyond the scope of what is available to external users. See Sections 5.5 and 5.6 for more information.

2.2 ADVANTAGES AND LIMITATIONS OF THE TECHNOLOGY

Here we describe some of the advantages and limitations of Cogenra's solar cogeneration technology as compared to relevant alternative technologies, especially flat-panel PV and SHW arrays. To provide the most accurate and broadly applicable information, we present a summary that draws from the results of many Cogenra installations, including the demonstration projects at Port Hueneme and PRFTA as well as a variety of civilian installations.

The advantages of Cogenra's technology include:

- Delivers 4-5X the total renewable energy (electricity and heat) per unit of installed module area compared with conventional PV.
 - Maximizes renewable energy production intensity to best utilize limited premium space such as rooftops;
 - Reduces lifecycle costs by delivering more energy per unit of solar infrastructure; and
 - Enables the DoD to achieve renewable energy targets on schedule by adding far more renewable energy capacity per project commissioned and by increasing the number of cost-effective deployment opportunities.
- Eliminates 2.6X more GHG emissions per unit area compared with conventional PV.
 - Achieves greater GHG reductions because the cogeneration system displaces more energy; and
 - Enables the DoD to achieve GHG reduction targets on schedule by eliminating more emissions per new project.

- Enables installations to economically satisfy the recently strengthened 30% solar hot water mandate,⁴ which otherwise will be challenging to meet cost effectively,⁵ as a nearly free added benefit to PV projects.
- Achieves faster payback time than a PV system of comparable area on the same site.
- Includes advanced controls and energy management logic to optimize energy generation to consumption patterns.
- Maintenance for Cogenra's SunDeck system is fairly minimal and requires little training. In general, operation and maintenance requirements are similar to standard PV and SHW systems. The systems have built in diagnostics that will alert the system owner if maintenance is needed. The following preventative maintenance items are recommended, but are not necessary if power output continues to meet expectations.
 - Annual visual inspection of the system. (No special training is required.)
 - Mirror washing during the dry months may be indicated.
 - Comprehensive inspection of the system every 5 years, including testing of the glycol solution. This should be performed by a trained technician but the system owner can perform all tests if desired.

The limitations of Cogenra's technology include:

- All distributed solar hot water systems require adequate and consistent hot water demand in order to perform at their full potential. For buildings with small or inconsistent hot water usage, return on investment from a solar cogeneration or SHW project will generally be less attractive than sites with greater hot water demand. This can be mitigated with any of the following solutions:
 1. Combining the water heating loops of multiple buildings can often enable cost-effective solar water heating for a group of buildings.
 2. Configuring Cogenra's system architecture to cheaply dissipate some or all of the captured heat, in cases where hot water demand is inadequate. Costs in this case are

⁴ EISA §523 requires that "If lifecycle cost-effective, as compared to other reasonably available technologies, not less than 30% of the hot water demand for each new Federal building or Federal building undergoing a major renovation be met through the installation and use of solar hot water heaters." The Army has restricted the qualifier clause and now requires that "**all** new construction projects with an average daily non-industrial hot water requirement of 50 gallons or more, and located in an area...receiving an annual average of 4 kWh/m²/day or more **will be** designed to provide a minimum of 30% of the facility's hot water demand by solar water heating. Waste heat harvesting, integrated co-generation systems, or a combination thereof may be used in lieu of solar water heating where they achieve equivalent energy savings." (emphasis added) Source: Army Memorandum on Sustainable Design and Development Policy Update (Environmental and Energy Policy) dated October 27, 2010 and signed by Katherine Hammack, Assistant Secretary of the Army (Installations, Energy, Environment).

⁵ The U.S. Army Corps of Engineers has concluded that conventional solar hot water is rarely cost-effective over its life cycle unless implemented in a district wide configuration, and even then generally has a long payback time typically much longer than 20 years. District wide heating is not always possible and by increasing minimum project scope may hinder implementation in many cases. Source: A. Zhivov, Central Solar Hot Water Systems Design Guide (Draft), U.S. Army Corps of Engineers (2011).

competitive with standard PV, and the system can always be retrofitted to deliver the captured heat if energy demands change in the future.

3. Increasing the size of the hot water storage tank to accommodate the excess heat during times of high production and low demand.
- Concentrating solar technologies are most cost-effective in locations with high direct normal irradiance (DNI). Cogenra recommends DNI of at least 1600 kilowatt hours per square meter per year ($\text{kWh/m}^2/\text{year}$), although places with lower direct irradiance may still be attractive depending on energy costs and renewable energy goals.

3.0 PERFORMANCE OBJECTIVES

The metrics that are expressed per unit area utilize the aperture area of the system. The aperture area of the Cogenra SunDeck is the projected area of the mirror bed that receives and re-directs sunlight to the receiver. Similarly, for PV and SHW modules, aperture area is equivalent to active module area.

1) Increase renewable energy delivered per unit area.

This objective is straightforward; the Cogenra system should deliver 4.75X more energy per unit area than a standard PV array in the same location. Conventional PV systems convert less than 20% of the sun's incident energy into electricity and struggle to dissipate the remaining 80+% as heat. Cogenra's solar cogeneration system captures this thermal energy as useful heat, and thus can deliver 5X the energy or more per unit module area. The success criterion is set at 4.75X to provide a reasonable margin.

The relevant metric is energy converted or delivered per unit gross module area, per year. This objective refers to total energy, both electrical and thermal. This demonstrates one of the core advantages of a cogeneration system.

The output of the reference PV system was simulated using industry-standard PV performance modeling methods, based on the actual measured solar irradiance and ambient conditions measured by Cogenra's weather stations at each site. PV performance results were validated against industry-standard modeling tools including PVsyst™ and National Renewable Energy Laboratory (NREL) PVWatts™. Additionally, one reference fixed-tilt PV panel was installed at each base alongside the Cogenra system, and the power output was measured continuously. This allowed for excellent validation of our comparison to standard PV.

Detailed results are presented and discussed in Section 6, Performance Assessment, and summarized in Table 1. Normalized per year and per unit area, the Cogenra systems delivered 408% the renewable energy of the reference PV array. The total energy was 825 kilowatt hours per square meter per year (kWh/m²/year). The corresponding success criteria laid out in the demonstration plan were 475% and 935 kWh/m²/year. The energy delivered by the systems was limited by inconsistent hot water usage at some of the buildings thereby preventing the full utilization of the cogeneration system. This was the main reason identified for inconsistent observed performance that is slightly short of the target set in Performance Objective #1. Adequate and regular heat usage is essential for fully realizing the benefits of any system that includes solar water heating. In general, the project team observed that hot water usage was particularly inconsistent at the barracks, which were not always occupied. Hot water usage at the kitchens was more consistent.

Table 1. Performance objectives.

Performance Objective	Metric	Data Requirements	Success Criteria	Results
Quantitative Performance Objectives				
1) Increase renewable <i>energy</i> delivered per unit area	kWh/m ² /year	Energy delivered; meteorological readings; comprehensive tracking of all internal parameters (to optimize performance)	475% of reference PV system 935 kWh/m ² /year (module area)	408% versus PV 825 kWh/m ² /year
2) Increase renewable energy <i>economic value</i> delivered per unit area	\$ /year-m ²	Energy delivered by type (electricity, heat); utility rates for offset energy	200% of reference PV system 200% of reference SHW system \$45 /year-m ² in energy savings	171% versus PV 140% versus SHW \$44.82/year-m ²
3) Reduce GHG emissions with a larger benefit per unit area	MT CO ₂ e / yr-m ²	GHG lifecycle analysis; energy delivered by type; baseline GHG emissions for offset energy sources (grid/natural gas)	260% of reference PV system 130% of reference SHW system 0.3 MT CO ₂ e / yr-m ² offset GHG	230% versus PV 115% versus SHW 0.28 MT-CO ₂ e/yr-m ²
4) Reduce payback time	years	Lifecycle cost analysis; energy delivered	70% of reference PV system 60% of reference SHW system <10 years (hypothetical HPPA)	56% of the reference PV system 65% of the reference SHW system 5.1 year payback solar cogeneration (see table in Section 6.4 of Final Report)
Qualitative Performance Objectives				
5) Accelerate compliance with DoD energy/ environmental goals	per system basis	Validation of performance objectives listed above; assessment of legal requirements and directives	Approximately twice the benefit/speed toward reaching goals	Results demonstrated the increased value of cogeneration versus PV or SHW alone
6) Low maintenance requirements	SOP	Operating and maintenance history; tests of automated monitoring systems	Comparable to PV and SHW	Similar to standard SHW and PV

HPPA = heat and power purchase agreement

SOP = standard operating procedure

2) Increase renewable energy economic value per unit area.

Demonstrating this objective involves convolving the performance data from the first objective with the utility rates paid by the sites. The metric used is economic value per unit of installed module area per year, \$/yr/m². This metric quantifies the energy cost savings that benefit the user.

Detailed results are presented and discussed in Section 6, Performance Assessment, and summarized in Table 1. Normalized per year and per unit area, the results show that the Cogenra

systems delivered \$44.82/yr/m² of savings. This was 171% the value of the reference PV array and 140% the value of the reference SHW array.

Although the Cogenra demonstration system provided much greater economic value than the reference PV or SHW arrays, the gain was less than the goal of 200% stated in Performance Objective #2. The primary reason for the difference was the inconsistent hot water usage at some of the buildings, especially the barracks. Inconsistent hot water demand limits the utilization of the cogeneration system overall, but especially the amount and value of the heat delivered. This is why the value added with respect to the reference system was less in the case of water heating than electricity generation, in this demonstration project.

3) Reduce GHG emissions with a larger benefit per unit area.

Demonstrating this objective involves convolving the performance data from the first objective with the GHG intensity factors of the offset energy sources, and also factoring in the “upstream emissions” associated with manufacturing and installing the system. Life Cycle Associates (LCA), an independent consulting firm specializing in life-cycle greenhouse gas analysis has already determined the appropriate baseline emissions factors and completed an upstream analysis of Cogenra’s system. Cogenra’s typical 2.6X GHG advantage relative to PV reflects the fact that solar cogeneration produces more renewable energy from a system of the same size, and thus offsets more fossil-fuel consumption. The advantage relative to SHW reflects the greater GHG intensity off offset electricity compared with heat; the factor of 1.3X is a typical lower bound that does not account for the higher energy production of Cogenra’s tracked system relative to conventional SHW.

Detailed analysis and results regarding GHG emissions are presented in Section 6, Performance Assessment, and summarized in Table 8. Normalized per year and per unit area, the results show that the Cogenra systems resulted in 0.284 MT-CO₂e/yr/m², just slightly less than the goal of 0.3 MT-CO₂e/yr/m² stated in Performance Objective #3. This was 230% the GHG offset by the reference PV array, and 115% the GHG offset by the reference SHW array.

4) Reduce payback time.

Detailed cost and payback analysis was performed for the Cogenra system and in comparison with reference PV and SHW systems. The results show that solar cogeneration payback is 56% of reference PV system, significantly out-performing the success criteria. The payback comparison to reference SHW also shows that the SunDeck system’s payback is 65% of reference SHW. The SunDeck system’s thermal payback is slightly above the reference SHW success criteria of 60%; this is mainly attributable to the usage limitations seen when the barracks were unoccupied. Thus, the system was not 100% utilized.

5) Accelerate compliance with DoD energy/environmental goals.

By delivering more renewable energy and offsetting more GHG emissions from available roof space, available land, and available project funds, Cogenra’s system enables the DoD to reach its goals more rapidly than relying on conventional solar technologies. The DoD’s energy and environmental goals are diverse, and the Cogenra system can help to accelerate compliance in several ways. Overall, the results from the demonstration project, as well as other Cogenra

installations, support an approximately two-fold acceleration towards cost-effective compliance with these goals. Additional discussion is given in Section 6.

6) Low maintenance requirements.

Operation and maintenance (O&M) requirements are an important component of the lifetime cost and reliability of any project. Cogenra's solar cogeneration technology combines and adapts technologies found in PV systems (PV modules, electrical wiring, inverters, trackers) and SHW systems (hydronics, piping, pumps, heat exchange with building hot water loop) and thus has similar maintenance requirements. Cogenra's monitoring software (developed as part of this demonstration project) monitors all sensors on the system as well as several additional performance metrics. This monitoring system allows for automatically detecting any specific maintenance needs and alerting the owner or operator. More generally, the performance monitoring helps to determine whether any "regular" or discretionary service (such as mirror washing or system inspection) is needed.

This qualitative performance objective was to demonstrate that the Cogenra system has low maintenance requirements that are similar to typical PV and SHW systems. Operation and maintenance history from these demonstration sites as well as Cogenra's many commercial installations support this description. Specific information on the maintenance carried out at the PRFTA and Port Hueneme sites is given in Section 6.

4.0 FACILITY/SITE DESCRIPTION

The demonstration project included both a Navy and an Army facility, in an effort to expedite the technology adoption after the project ends. PRFTA, in Dublin, California, has a total of two installations; one each of 28 and 32 modules. Port Hueneme, near Oxnard, California, has a total of three installations; two of 24 modules and one of 36 modules.

4.1 FACILITY/SITE LOCATION AND OPERATIONS

Port Hueneme, a facility within Naval Base Ventura County (NBVC) on the southern coast of California, hosted the primary demonstration. This project site includes three discrete SunDeck arrays installed on the roofs of these buildings:

- PH61 (Dining Facility/Galley) — 24 modules,
- PH1481 (Bachelor Enlisted Quarters) — 24 modules, and
- PH1517 (Quad Bachelor Quarters: four buildings with central heating) — 36 modules.

The total system nameplate energy production is 200 kW (36 kW-e + 164kW-th), including the three arrays.

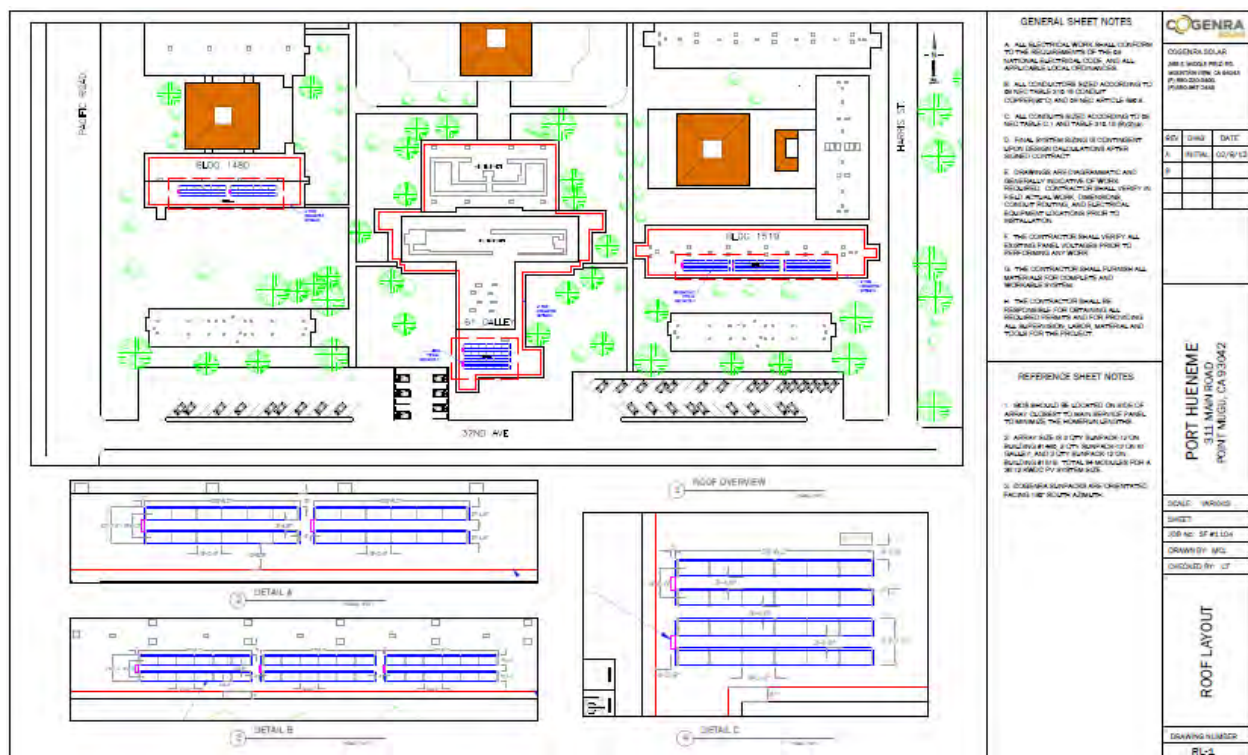


Figure 2. Port Hueneme plan view.

Parks Reserve Forces Training Area (PRFTA), an Army Reserve Component mobilization and training facility located in Dublin, California, hosted the second demonstration. Because the Army selected PRFTA as one of six pilot net zero energy installations, it has a particularly strong need

to identify renewable energy technologies, such as solar cogeneration, that maximize production of energy from the sun and that offset multiple types of energy use.

The PRFTA site includes two discrete SunDeck arrays installed on the roofs of these buildings:

- PRFTA 332 (Dining facility) – 28 modules, and
- PRFTA 394 (Bachelor Enlisted Quarters) – 32 modules.

This project site includes two discrete SunDeck arrays for: (1) a Dining Facility, and (2) a pair of Bachelor Enlisted Quarters (BEQ) (Buildings 393 and 394) and Laundry Facility (Building 398). The two BEQs and laundry are served by a single SunDeck array, creating a simple district-heating configuration that can serve as a model for future implementations that involve multiple buildings. The total system nameplate energy production is 140 kW (25 kW-e + 115 kW-th), including both arrays.

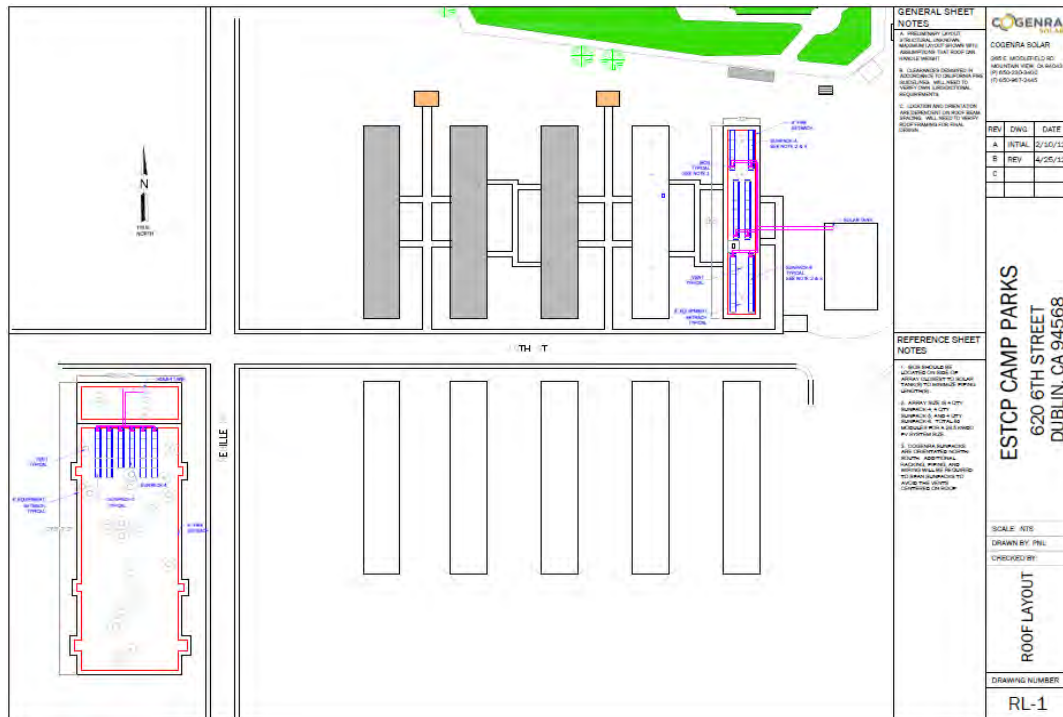


Figure 3. PRFTA plan view.

4.2 FACILITY/SITE CONDITIONS

Specific site conditions are important for any renewable energy project, especially for rooftop installations. Comments and observations from Cogenra's field operations team are summarized below for the demonstration installations.

Port Hueneme

- Early morning fog and cloud cover at Port Hueneme NBVC; and
- Difficult roof access at Buildings 1517 and 1481.

PRFTA

- Canadian geese visit these roofs and occasionally leave droppings on the systems;
- Ladder access required on Building 394;
- Safety line tie-off required due to roof edge proximity to the system (no parapet) on B394; and
- B394 is near a lot of dry open area that may contribute to mirror soiling.

This page left blank intentionally.

5.0 TEST DESIGN

5.1 CONCEPTUAL TEST DESIGN

The test plan and design was detailed in Cogenra's Demonstration Plan, and followed throughout the course of the two-year project. The demonstration project was designed to test how much Cogenra's solar cogeneration system outperforms traditional PV and SHW systems. The performance of Cogenra's system was measured and compared to calculated performance numbers for photovoltaic and solar hot water systems.

The key performance parameters were: (1) how much renewable energy is produced per square foot of solar system, (2) the dollar value of the renewable energy produced per square foot of solar system, (3) the reduction in GHG emissions per square foot of solar system, and (4) the payback period of the solar system.

These values were measured while at the same time controlling for external factors, such as hot water demand and weather. This allows us to provide an "apples to apples" comparison of the different renewable energy systems.

The key technical tasks, tests, and technical and economic assessment methods were as follows:

Task 1: Install energy consumption metering

Cogenra installed meters to measure the flow rate and temperature of hot water exiting the water heaters of all buildings comprising the demonstration project at Port Hueneme and PRFTA.

Task 2: Assess site's baseline energy consumption

Utilizing the water meters installed in Task 1, Cogenra tracked the hot water consumption profile of the buildings in the demonstration project for 1.5 years and has correlated the results with season, weather, occupancy, time of day, day of week, and other factors via regression analysis.

Task 3: Design demonstration project –and- Task 4: Build demonstration project

Cogenra worked with the general contractor for each project site in order to carry out the design and construction of the demonstration project. Contractor tasks included:

- Complete all preliminary, development and engineering designs and obtain site approval and design approvals.
- Prepare the Quality Control Plan, Environmental Plan, Safety Plan, and Fault Protection Plan, and obtain all necessary permits and approvals related to these plans.
- Manage all activities relating to site preparation, delivery of major equipment, construction, installation, quality control assurance, clean up, and initial turn on and validation of the demonstration systems.
- Obtain final inspections, approvals, and oversee commissioning of the projects.

Cogenra provided engineering and logistical support and procured the components of the SunDeck modules from established, qualified vendors.

Task 5: Operate project, monitor and optimize

Cogenra has operated the demonstration systems at Port Hueneme and PRFTA for 1 full year, monitored their performance across seasons, and utilized the operating data in combination with energy usage data to optimize the amount and value of renewable energy delivered. As described in the demonstration plan, the project team did the following:

- Measured energy produced and energy delivered to each base (separately for heat and electricity) and other diagnostic parameters, including weather data.
- Compared these data with a sophisticated predictive model that Cogenra has developed.
- Assessed the directly measured energy production totals and their economic value based on Port Hueneme's and PRFTA's actual energy rates. We have compared these results with the performance objectives in absolute terms and relative terms with PV and SHW reference designs.
- Assessed GHG reduction based on actual energy production, analysis of offset energy resources, and a pre-existing life cycle analysis that accounts for manufacturing and installing the solar array, including validation of the GHG reduction relative to site baseline and compared to conventional PV and SHW reference designs.
- Demonstrated successful remote monitoring of performance and system health; documented operational and maintenance requirements.
- Verified tracking accuracy over time and the reliability of the motion mechanism. (Note: these tolerances are wide since tracking occurs along a single axis, not in 2D.)
- Measured performance degradation over time resulting from accumulation of dirt on the system ("soiling") to determine the optimal surface cleaning interval, balancing the impacts on energy production and operating cost. (Note: the anticipated schedule was one or two times per year based on experience at Special Warfare Command [SWC].)
- Determined an appropriate inspection interval (estimated: 5 years) based on the tests described above, the capabilities of the system self-diagnostics, and DoD guidelines to justify the inspection interval.

Task 6: Prepare cost analysis and HPPA analysis

This task included:

- Preparing comprehensive life cycle cost analyses for the demonstration systems based on the final total installed cost and O&M costs over the demonstration period (plus projected costs).
- Projecting the analyses for future systems of the same type, based on an analysis of the bill of materials together with documented vendor quotes for materials when purchased in higher quantities.
- Preparing simulated comprehensive life cycle energy price and investment return analyses for the demonstration systems as if they were financed and built by private

investors through an HPPA arrangement able to capture tax credits and other incentives not available to a system acquired directly by the DoD.⁶

- Comparing the analyses listed above with similar cost analyses of the reference PV and SHW systems.
- Generalizing the model to future systems for the DoD, including variables such as location, utility rates (including tiered and time-of-use rate structures), hot water consumption profiles, and incentives and tax credits.

Task 7: Prepare reports and present results

Cogenra has prepared final cost and performance reports to rigorously document performance and cost parameters for solar cogeneration systems engineered to military specifications. The results add to the findings of previous case studies obtained in civilian commercial and industrial settings.

5.2 BASELINE CHARACTERIZATION

As described in the demonstration plan and test design, Cogenra installed meters to measure the hot water consumption at each of the five buildings in the demonstration project. Measurements began as early as October 2012.

Extensive results of the baseline hot water usage metering at each building are presented in the full report. Examples of some of the results of the baseline characterization are given below for the Kitchen at Port Hueneme. Table 2 shows a simple summary of the typical measured hot water usage at each building, in gallons per day (GPD). Hot water gallons/day usage is one of the most important parameters for evaluating the hot water demand—and thus the potential benefit of a solar hot water or cogeneration system—at a site.

**Table 2. Summary of typical hot water usage in GPD
as measured for each building.**

Project Site	Typical Measured Hot Water Usage (GPD)
Port Hueneme, Bldg 61 Kitchen	2500 – 3500
Port Hueneme, Bldg 1481 Barracks	300 – 1200
Port Hueneme, Bldg 1517 Barracks	5900*
PRFTA, Kitchen	1500 – 2000
PRFTA, Barracks and Laundry	60 – 300

* Partial measurement; see appendix for details

An important result from Table 2 is that water demand varied widely among the five buildings in the demonstration project. Two of the barracks buildings (Port Hueneme Bldg 1481 and PRFTA Bldg 394) had especially low or inconsistent hot water usage. Hot water demand directly impacts how much useful energy a solar hot water system can deliver, and the inconsistent usage at some

⁶ We did not propose to set up the demonstration projects as HPPAs because of the anticipated complexity of acquisition related issues in the context of an ESTCP-funded project. A key objective of the demonstrations is to generate validated results at DoD sites to help secure private investment in future systems arranged as HPPAs.

of the buildings in the demonstration project means that the cogeneration systems were not fully utilized at these sites.

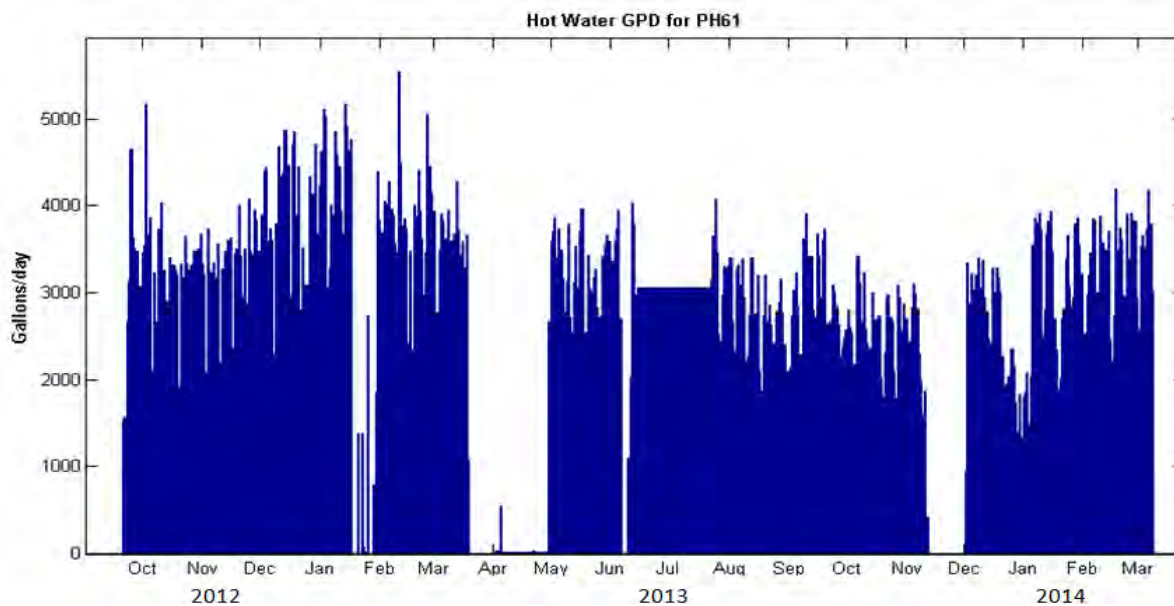


Figure 4. Hot water usage per day at Port Hueneme, Building 61.

Hot water gallons/day usage is one of the most important parameters for evaluating the hot water demand—and thus the potential benefit of a solar hot water or cogeneration system—at a site.

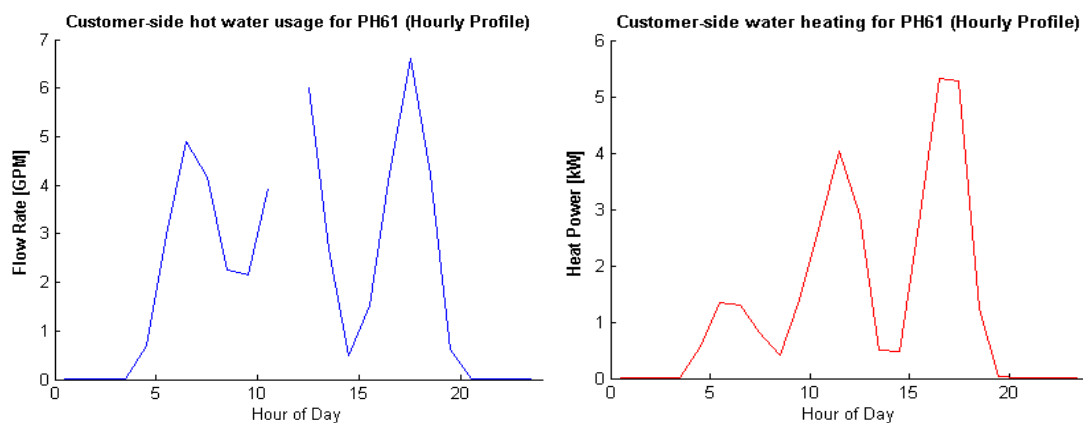


Figure 5. Daily hot water usage profiles, for Port Hueneme, Building 61.

All days with measured hot water usage were combined with an hourly average to determine the typical daily profile. This example clearly shows three peaks corresponding to the three meals per day at the galley.

5.3 DESIGN AND LAYOUT OF TECHNOLOGY COMPONENTS

Cogenra's SunDeck solar collectors are water-cooled CPV parabolic troughs that capture rather than dissipate what other PV approaches call "waste heat." The architecture comprises a series of arrays that independently track the sun along one axis. Within each array, a series of flat mirrors

concentrate sunlight (~8X) onto silicon-based PVT panels that generate electricity. Conduits extruded directly through the panel back-plate carry a water-glycol mixture in a closed loop that cools the PV cells and captures the excess solar energy as heat. A compact SHW heat exchange/storage system transfers the heat to preheat the domestic water supply before it enters the site's pre-existing hot water heater.

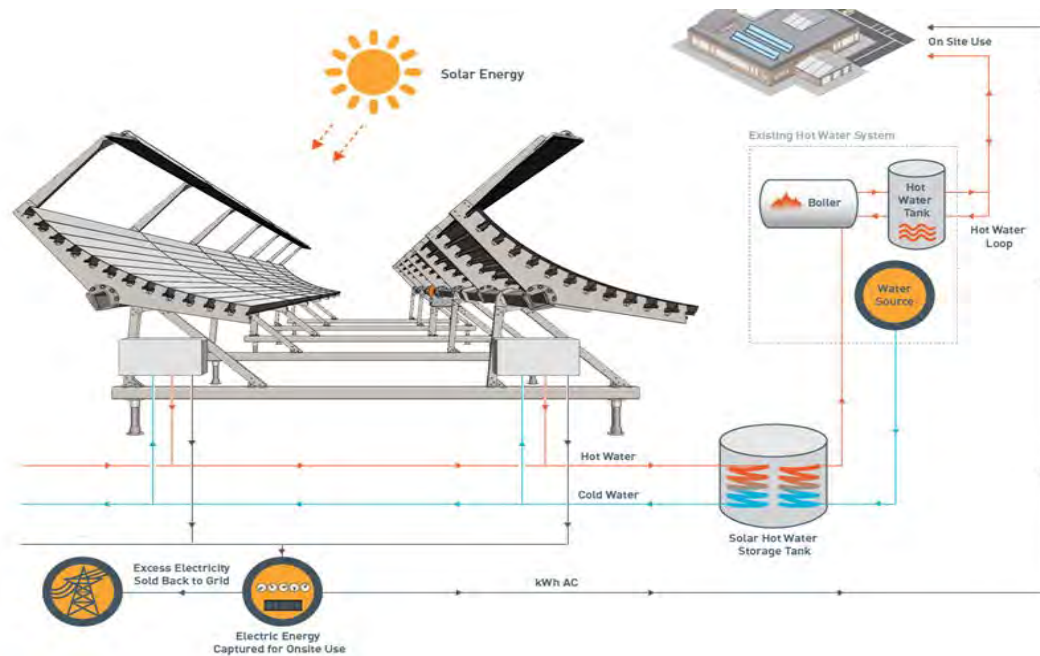


Figure 6. Typical system configuration.

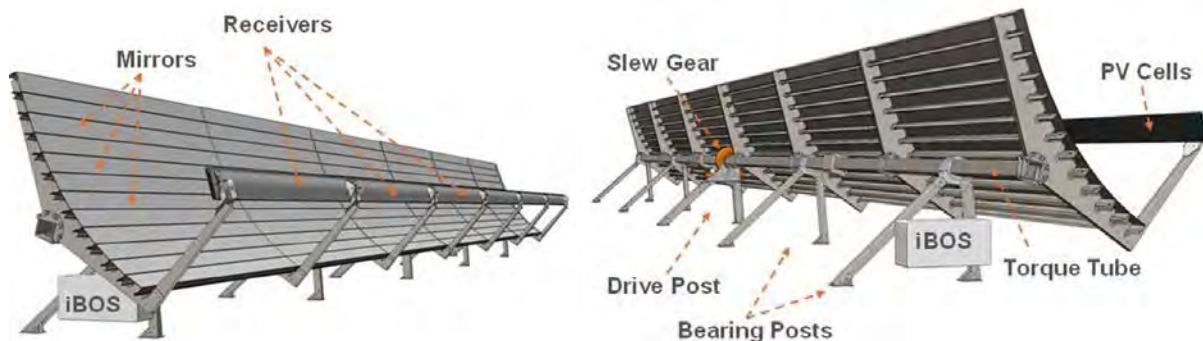


Figure 7. System components, front and back sides.

Each roof-mounted SunDeck module comprises one half-parabola that focuses onto a single PVT panel mounted above the mirrors along the focus line. The module axis can be oriented in any orientation, and the module pivots around that axis to track the sun. This configuration enables a much lower profile, lower wind loading, and lighter weight (5 psf total) than the ground-mounted SunBase, and is suitable for nearly all types of roofs with a pitch of up to 20°.

Each SunDeck includes a small control box that receives input from a number of sensors and can control the position and water flow rate of the SunDeck. This control unit also relays data back to

central servers to allow for monitoring of the system. Positioning of the system is controlled through a combination of an angle sensor and proprietary sensor designed to monitor the position of the light on the receivers and ensure that it stays centered. Water temperature is controlled by three temperature sensors and a flow sensor. This allows the SunDeck to ensure that the hot water is exiting the system at a set-point temperature if desired, regardless of the input temperature and how much sun there is.

The control box is part of the SunDeck iBOS, an integrated balance-of-systems unit. In addition to the system controller, the iBOS contains the hydronics components including the pump, flow pressure and temperatures sensors, valves and hydronic connections. The iBOS is also integrated with the photovoltaic inverter.

5.4 OPERATIONAL TESTING

Data collection during operation and testing of the system is made simple as all data is automatically uploaded to a central server. Regardless of the state of the system, data from all temperature sensors, flow sensors, angle sensors, proprietary positioning sensors, motor current, pump current, and a number of other parameters from the SunDeck systems are recorded.

For this demonstration temperature and flow meters were also installed in the demonstration buildings. Data from these sensors are recorded and uploaded to a central database. This continuous data collection allows Cogenra to monitor and assess the performance of the system during all operating conditions.

This demonstration project also included weather stations at each of the two locations. These weather stations measure solar irradiance, ambient temperature and wind speed.

The data collected can be compared to a sophisticated predictive model that Cogenra has developed. The model predicts the PV and thermal outputs of the system based on the system dimension, calculated sun angle, measured irradiance, mirror reflectivity and PV response of a typical receiver (previously measured in the laboratory), various thermal coefficients (empirically determined), inverter specifications, ambient temperature, wind velocity, specified thermal load, and flow rate.

The actual dates and duration of the operational testing are shown in Figure 8, the complete project schedule.

Demonstration Project Schedule	2012										2013										2014				
	A	M	J	J	A	S	O	N	D	J	F	M	A	M	J	J	A	S	O	N	D	J	F	M	A
Install Energy Metering																									
Design Installations																									
Construction																									
Monitoring and Baseline Assessment																									
Final Assessment																									
Develop System Design Tools																									
Engineer Integrated BOS System																									

Figure 8. Project schedule, including all phases of operation and testing.

Once the demonstration is finished the systems can continue operating for more than 20 years. During this time very little maintenance is required and much, if not all of it, can be performed by facility staff. O&M of Cogenra's SunDeck system is fairly minimal and thus requires very little training. The systems have built-in diagnostics that will alert the system owner if maintenance is needed. The owner can also monitor performance online. The following preventative maintenance items are recommended, although they are not necessary if power output continues to meet expected design parameters:

1. Annual visual inspection of the system.
2. Mirror washing during the dry months may be indicated.
3. Comprehensive inspection of the system every 5 years, including testing of the glycol solution. This should be performed by a trained technician, but the system owner can perform all tests. Technician certification takes about a half day.

5.5 SAMPLING PROTOCOL

Data is continuously collected from all sensors installed in the demonstration buildings and integrated into the SunDeck systems. These sensors automatically record data averages on 5-minute intervals, and then this data is uploaded to a central database. A list of all important sensors or measurements is provided in Table 3.

Table 3. List of measurements.

Sensor or Measurement	Location or Multiplicity	Data Logging
Direct normal irradiance	Weather station at each site	5 minutes, 24/7
Diffuse horizontal irradiance	Weather station at each site	5 minutes, 24/7
Ambient temperature	Weather station at each site	5 minutes, 24/7
Wind speed	Weather station at each site	5 minutes, 24/7
Glycol solar loop inlet and outlet temperatures	Each SunDeck row and array	5 minutes, 24/7
Glycol solar loop flow rate	Each SunDeck row and array	5 minutes, 24/7
Domestic hot water flow rate	Each system (each building)	5 minutes, 24/7
PV Imp, Vmp, Pmp DC, Pmp AC	Each inverter	5 minutes, daytime
Tracker angle	Each SunDeck row	5 minutes, 24/7

5.6 SAMPLING RESULTS

As described in the sampling protocol above, the Cogenra systems include a wide range of sensors that record data on 5-minute intervals. An example of the type of data recorded for each Cogenra system is shown in Figure 11, as viewed using one of Cogenra's proprietary in-house data monitoring tools.



Figure 9. Example of two days of 5-minute sampling data as viewed using one of Cogenra's proprietary in-house data tools.

Data shown is for a system at Port Hueneme, Building 61 (Galley).

6.0 PERFORMANCE ASSESSMENT

1) Increase renewable energy delivered per unit area.

The electrical and thermal energy converted by each SunDeck array was measured throughout the course of the demonstration. Performance Objective #1 specifies that this energy be compared to what a reference flat-panel PV array would produce for the same area. The key criterion for success was to produce 475%, or 4.75X the energy of the reference PV array.

The output of the reference PV system was simulated using industry-standard PV performance modeling methods, based on the actual measured solar irradiance and ambient conditions measured by Cogenra's weather stations at each site. PV performance results were validated against industry-standard modeling tools including PVsyst™ and NREL PVWatts™. Additionally, one reference fixed-tilt PV panel was installed at each base alongside the Cogenra system, and the power output was measured continuously. This allowed for excellent validation of our comparison to standard PV.

A full year of energy output data was used to evaluate the system performance with respect to Performance Objective #1. The plots below show a sample of the results for two of the five installations, showing results from May and/or June 2013. In addition to the Cogenra system (measured) and reference PV system (simulated with measured validation), results are also shown for an analogous reference SHW system.

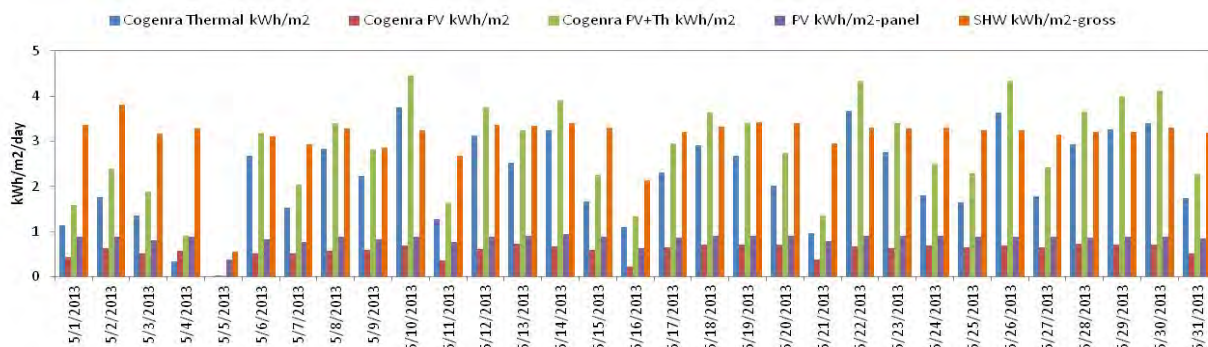


Figure 10. Cogenra system PV and thermal energy output per square meter per day, along with reference PV and SHW systems, for Port Hueneme Galley.

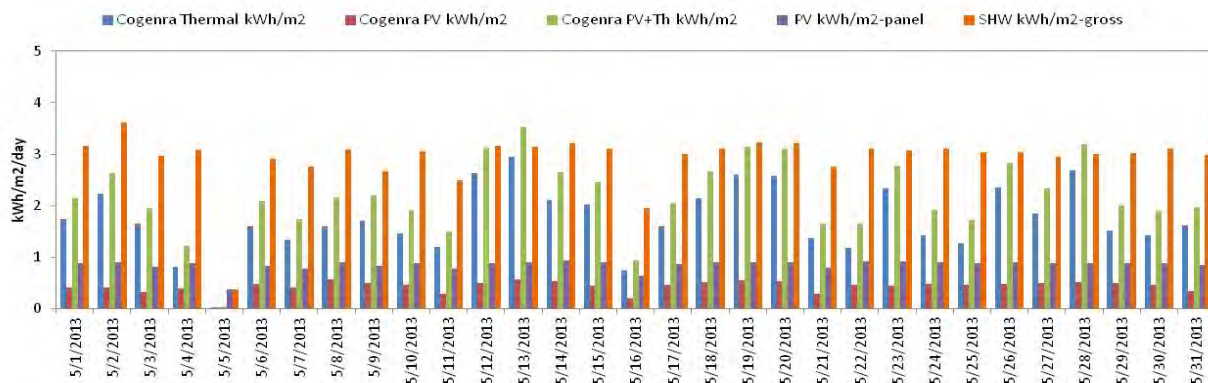


Figure 11. Cogenra system PV and thermal energy output per square meter per day, along with reference PV and SHW systems, for Port Hueneme Barracks 1481.

Additionally, a full year of monthly output is summarized in the tables below. The tables show results from two of the installations at Port Hueneme.

Table 4. Monthly output table for Port Hueneme Bldg 1481 (Barracks).

Time Period	Electricity [kWh]	Heat [kWh]
Apr 2013	281	304
May 2013	1143	4550
June 2013	641	2892
July 2013	478	2390
Aug 2013	535	2371
Sept 2013	522	2086
Oct 2013	522	2088
Nov 2013	519	2076
Dec 2013	713	2852
Jan 2014	596	2324
Feb 2014	474	1872
Mar 2014	722	2852

Table 5. Monthly output table for Port Hueneme Bldg 61 (Galley).

Time Period	Electricity [kWh]	Heat [kWh]
Apr 2013	305	1220
May 2013	1537	5765
June 2013	714	3703
July 2013	437	2186
Aug 2013	734	2867
Sept 2013	866	2841
Oct 2013	555	1805
Nov 2013	102	461
Dec 2013	*Building power surge knocked out communication	
Jan 2014		
Feb 2014	134	549
Mar 2014	529	2090

A summary of the important results is presented in Table 6. Normalized per year and per unit area, the Cogenra systems delivered 408% the renewable energy of the reference PV array. The total energy was 825 kWh/m²/yr. The corresponding success criteria laid out in the demonstration plan were 475% and 935 kWh/m²/yr. The energy delivered by the systems was limited by inconsistent hot water usage at some of the buildings, preventing the full utilization of the cogeneration system. This is the main reason identified for observed performance that is slightly short of the target set in Performance Objective #1. Adequate and regular heat usage is essential for fully realizing the benefits of any system that includes solar water heating. In general, it was observed that hot water usage was particularly inconsistent at the barracks, which were not always occupied. Hot water usage at the kitchens was more consistent. Further analysis and explanation follows below.

Table 6. Summary of energy output versus reference PV array.

Cogenra thermal output	657 kWh/m ² /yr
Cogenra PV output	168 kWh/m ² /yr
Cogenra PV + thermal = total energy	825 kWh/m ² /yr
Reference PV array	202 kWh/m ² /yr
Cogenra/PV total renewable energy	408% versus Standard PV

A solar thermal system can only deliver, at maximum, as much heating as the customer actually uses. When hot water usage is low, the domestic hot water loop draws less heat energy from the solar loop than the system has the capacity to provide. This causes the solar tank to increase in temperature. In this way, the solar tank provides valuable hot water storage. However, as the tank heats up, the solar array is able to add less and less heat. This is because the thermal efficiency of any solar thermal collector decreases with temperature due to heat losses.

Figure 12 and Figure 13 illustrate the effect of inconsistent hot water demand at the PRFTA Barracks. Figure 12 shows the temperature reached by the solar fluid loop for each day throughout the spring and summer of 2013. The temperature exceeded 60°C (140°F) on many days, a high temperature for a domestic hot water system. *This high temperature is a direct consequence of the hot water demand in the building, and directly limits the performance of the solar array.*

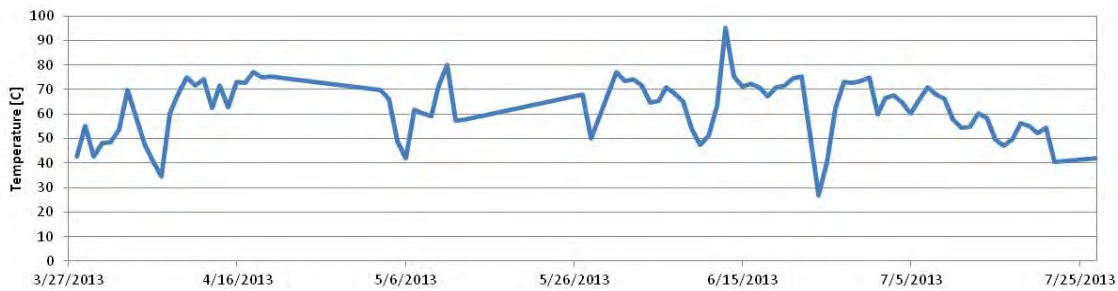


Figure 12. Daily maximum solar-loop fluid temperatures at PRFTA Barracks.

The second figure plots the electrical and thermal output of a SunDeck row at the PRFTA Barracks for 2 days, and clearly shows how system performance was limited by low hot water usage. In the morning, the solar tank is cold and the array delivers both heat and electricity at its full capacity. As the day progresses, if hot water usage is inadequate, the temperature of the solar tank rises and the system is able to add less and less heat. In this situation, *the system continues to perform properly, but the thermal energy output is limited by how much the customer is using.* In some cases, if the fluid temperature reaches 70°C (158°F), the system will “de-track,” i.e., move off sun temporarily to avoid overheating.

In summary: The SunDeck systems performed well and delivered over 4X as much energy as a reference PV array, but some of the systems were not fully utilized due to inconsistent hot water demand. This resulted in energy output slightly short of the 4.75X target in Performance Objective #1. Although it is difficult to model precisely, our analysis suggests that under-utilization contributed to overall performance reductions of 10-15% for PV and 20-30% for water heating.

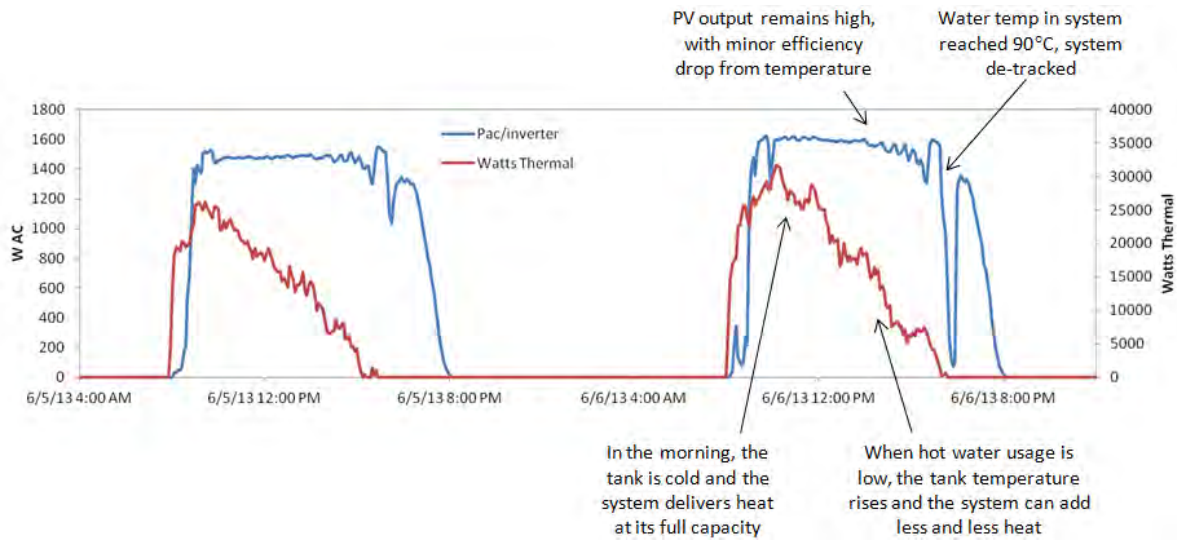


Figure 13. Electrical and thermal output for a SunDeck row at PRFTA Barracks, clearly showing the impact of low or inconsistent hot water usage.

2) Increase renewable energy economic value per unit area.

Objective #2 refers to the *economic value* of the renewable energy delivered by the system, and thus combines the energy results from Objective #1 with the utility rates paid by the customer. To determine energy savings and economic value, one must consider the energy usage that was offset by the renewable energy delivered. In the case of electricity, the electricity offset simply equals the electricity delivered. With water heating, the gas boiler (water heater) efficiency must be taken into account. Each therm of heat delivered by the solar array directly heats the water. A therm of natural gas heats water by a lesser amount, namely the boiler efficiency. A therm or kWh of heat delivered by the solar array thus offsets a greater amount of natural gas or other fuel that would have been required to provide the same water heating.

Table 7 summarizes the energy value delivered by the Cogenra system, along with reference PV and SHW arrays in the same location. The energy costs assumed are \$0.13/kWh for electricity and \$0.82/therm for natural gas (including delivery), which are representative of the rates paid by the bases. Typical boiler efficiency of 80% is used.

Table 7. Summary of energy economic value versus reference PV and SHW arrays.

	Array Energy Delivered [kWh/m ² /yr]	Energy Offset [kWh/m ² /yr]	Energy Value [\$ /yr/m ²]
Cogenra thermal output	657	821	\$23.00
Cogenra PV output	168	168	\$21.82
Cogenra PV + thermal = total energy	825	989	\$44.82
Reference PV array	202	202	\$26.28
Reference SHW array	915	1144	\$32.01

Assumptions: electricity at \$0.13/kWh, natural gas at \$0.82/therm (including delivery), boiler efficiency 80%

The results show that the Cogenra system produced 171% of the value of the reference PV array and 140% of the value of the reference SHW array. (Note: that if the solar heat is displacing

electricity as in some installations, the value from the Cogenra system would be \$107.25/yr/m², 408% of the reference PV array.)

Although the Cogenra demonstration system provided much greater economic value than the reference PV or SHW arrays, the gain was less than the goal of 200% stated in Performance Objective #2. The primary reason for the difference was the inconsistent hot water usage at some of the buildings, especially the barracks. Inconsistent hot water demand limits the utilization of the cogeneration system overall, but especially the amount and value of the heat delivered. This is why the value added with respect to the reference system was less in the case of water heating than electricity generation, in this demonstration project.

3) Reduce GHG emissions with a larger benefit per unit area.

LCA, an independent consulting firm specializing in life-cycle GHG analysis, studied the Cogenra system by convolving its system's solar production with the GHG intensity factors of the offset energy sources; factoring in the "upstream emissions" associated with manufacturing and installing the system. The results of this study are shown in the figure below:

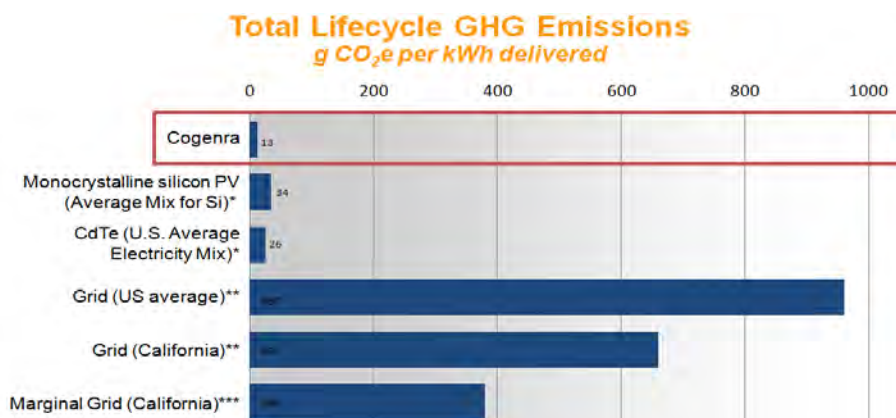


Figure 14. Lifecycle GHG emissions analysis performed by Life Cycle Associates.

Solar Cogen versus PV: Compared with a single-axis tracked PV system with the same type of solar cells and the same collection area, Cogenra's system produces approximately 5X the total renewable energy—the same amount of electricity and in addition 4X that much energy as hot water. Taking into account the relative carbon intensities of generating electricity and heating water, the overall advantage works out to 2.6X.

Solar Cogen versus SHW: A fair comparison between solar cogen and SHW is more difficult because SHW systems are usually much simpler and do not track the sun. A SHW system that tracks the sun could in theory produce about the same total energy as a Cogenra system of the same size. The Cogenra system would nonetheless offset at least 1.3X more GHG emissions because generating electricity by conventional means incurs a higher carbon intensity than heating water. In practice, SHW systems do not usually track the sun, so they produce less energy and Cogenra's advantage will thus be higher than 1.3X.

Combining the production data from the installations in this ESTCP project, the GHG intensity factors and the study presented above, the actual greenhouse gas emissions offset by the

demonstration project are calculated and shown in the table below. The corresponding GHG offsets for the reference PV and SHW arrays are shown as well.

Table 8. GHG emissions offset by the Cogenra SunDeck demonstration system, and compared to reference PV and SHW arrays.

	Array Energy Delivered [kWh/m ² /yr]	Energy Offset [kWh/m ² /yr]	Net GHG Savings Intensity [g-CO ₂ e/kWh]	GHG Offset [MT-CO ₂ e/yr/m ²]
Cogenra thermal output	657	821	216	0.177
Cogenra PV output	168	168	632	0.106
Cogenra PV + thermal = total energy	825	989	-	0.284
Reference PV array	202	202	611	0.123
Reference SHW array	915	1144	216	0.247

As shown in Table 8, the energy delivered by the Cogenra SunDeck array offset 0.284 metric tons of CO₂-equivalent emissions per year per m² of module area. This GHG emissions reduction was 230% of the reference PV array and 115% of the reference SHW array.

4) Reduce payback time.

The table below shows the cost and performance comparison of the Cogenra demonstrated system with an equivalent conventional photovoltaic and equivalent solar hot water system has been considered. The SunDeck cogeneration system similar to the type installed at Port Hueneme and PRFTA but with updated receivers utilizing the latest available high-efficiency cells has been considered. The energy production values are for locations similar to Port Hueneme and PRFTA with respect to solar resources.

Table 9. Lifecycle costs and payback comparison of Solar cogeneration versus reference PV and SHW.

Comparison (\$) – Cogenra SunDeck™ versus PV versus SHW						
Investment	Cogenra SunDeck™		Equivalent Cost PV		Equivalent Cost SHW	
Total investment	\$915,605		\$258,750		\$888,000	
Federal ITC (30%)	-\$266,400		-\$77,625		-\$266,400	
CSI incentive (2Yr)	-\$382,353		\$0		-\$382,353	
Net investment	\$266,852		\$181,125		\$239,247	
Energy Output	Electrical	Thermal	Electrical	Thermal	Electrical	Thermal
Annual displacement	113,219 kWh	505,440 kWh	113,219 kWh	0 kWh	0 kWh	505,440 kWh
Year 1 Financials	Electrical	Thermal	Electrical	Thermal	Electrical	Thermal
Cost savings from avoided energy	\$15,285	\$18,109	\$15,285	\$0	\$0	\$18,109
Revenue total	\$33,393		\$15,285		\$18,109	
Operating cost	-\$1800		-\$492		-\$1687	
Financing cost	\$0		\$0		\$0	
Tax benefit (+) / liability (-)	\$20,246		\$25,372		\$23,086	
Equity cash flow after-tax	-\$397,908		-\$140,961		-\$390,917	
Simple payback	5.1 Years		9.1 Years		7.8 Years	
Equity IRR (unlevered, after-tax)	15.40%		11.20%		10.10%	

ITC = investment tax credit

CSI = California Solar Initiative

The payback analysis incorporates solar rebates, which would be eligible to the system owner if implemented in power purchase agreement structure. These rebates include the federal government 30% investment tax credit and the California Solar Initiative Thermal program's performance based incentive (CSI Incentive). This CSI-Thermal incentive is available only for solar thermal technologies, not for PV systems.

The sensitivity of the system payback was evaluated with respect to various parameters: energy rates, solar resource, and hot water demand. See Table 14.

As can be seen from the table, the solar cogeneration offers the best overall payback and return on investment due to the dual energy offset savings and cost reduction from the combined implementation and installation of PV and SHW.

5) Accelerate compliance with DoD energy/environmental goals.

The DoD's energy and environmental goals are discussed in Section 1.3 and Section 3, Performance Objective #5. For this qualitative performance objective, we summarize below how the Cogenra system contributes to reaching these goals at an accelerated rate:

DoD Goal: Produce or procure more energy from renewable resources

- Cogenra SunDeck delivered 408% the renewable energy versus standard PV per unit area. With sufficient hot water demand, this factor can be 5X.

DoD Goal: Reduce GHG emissions

- Demonstrated GHG offsets of 230% versus standard PV based on module area.

DoD Goal: At least 30% of water heating from cost-effective solar

- The cogeneration system provides solar water heating while sharing the system cost with the PV components.

The DoD's energy and environmental goals are diverse, and the Cogenra system can help to accelerate compliance in several ways. Overall, we believe that the results from the demonstration project as well as other Cogenra installations support a roughly 2X acceleration towards cost-effective compliance with these goals.

6) Low maintenance requirements.

Cogenra records, categorizes and tracks all service actions taken at any of our field installations, including these demonstration sites and our commercial installations. Because Cogenra's monitoring software monitors all sensors on the system as well as several additional performance metrics, most if any maintenance needs are detected easily and automatically and signaled with automated alarms. This capability allows for promptly detecting any issues and responding with the appropriate maintenance action. The system monitoring also helps to determine when the best time for "regular" maintenance is, e.g., cleaning the mirrors if PV output indicates significant mirror soiling.

The automated monitoring system worked well throughout the demonstration project. Specific maintenance actions carried out at the demonstration projects are listed in the full report. Overall, these O&M needs are comparable to typical PV and SHW systems.

7.0 COST ASSESSMENT

7.1 COST MODEL

A summary of the demonstration project costs is shown above in Table 10. The total actual cost for the demonstration project was \$915,568. The cost proposed in the demonstration plan was \$882,520; the difference is partially due to the need to use union labor, which was not budgeted.

Table 10. Project cost table.

Cost Element	Data Tracked During Demonstration	Estimated Cost	
		PRFTA (60 modules)	NBVC (84 modules)
Hardware capital costs	Costs for water tanks, structural materials, piping, and wiring		
	SunDeck modules	\$84,000	\$117,600
	Racking and structural components	\$73,026	\$102,236
	Tanks and heat exchangers	\$24,698	\$36,447
Installation costs	Labor costs	\$197,295	\$270,516
Engineering design	Labor costs	\$2000	\$5000
Consumables	None	-	-
Facility operational costs	Solar plant requires no operational expense but helps reduce energy utilized in the building; i.e., enables operational savings.	-	-
Maintenance	Frequency and duration	\$750	\$1050
Hardware lifetime	None	-	-
Operator training	Cogenra has trained facility staff in how to maintain the SunDeck system for many installations.	\$500	\$500
Salvage value	None	-	-
Total cost		\$383,219	\$533,349

7.2 COST DRIVERS

Site-specific cost drivers:

- So-called “soft costs” can often vary by project and location, and include labor cost for installation, supply chain costs such as shipping components to a particular site, and permitting fees.
- Rooftop versus ground-mount: Although Cogenra’s SunDeck system is specifically designed for cost-effective installation on building rooftops, installation on the ground is usually less expensive.
- Dust and soiling factors: Solar PV and SHW modules are subject to the accumulation of dirt and other contaminants on their active area, known as soiling. The rate of soiling accumulation can be very site-specific. Areas with higher soiling may require more frequent module cleaning, corresponding to an increase in O&M costs.
- Based on the site hot water usage profile and demand, it may be recommended to utilize a heat dump to dissipate the excess unused heat during times of low heat demand.

General cost drivers:

- Raw material costs, such as the costs of aluminum and steel.
- The availability of high-efficiency silicon photovoltaic cells reduces the \$/W or \$/kWh cost of Cogenra's low-concentration cogeneration system. Because Cogenra's SunDeck system requires only 1/8th the silicon cell area of traditional PV modules, Cogenra can effectively leverage higher-efficiency cells to greatly reduce overall cost. As high-efficiency silicon PV cell technologies continue to improve, this will drive down the cost of Cogenra's system more rapidly than modules that require more cell area.

7.3 COST ANALYSIS AND COMPARISONS

Life-cycle cost analysis for implementing the demonstrated technology in its current version (roof-top) and comparison to Cogenra's recently released ground-mount version was performed. For future deployments of the technology, Cogenra's ground-mount version of the system is what will likely be deployed as this version and associated improvements have enabled significant cost reduction of the technology.

A cogeneration system similar to the type installed at Port Hueneme and PRFTA but with updated receivers utilizing the latest available high-efficiency cells has been considered. The table below outlines the system capacity utilized in this analysis. The energy production values are for locations similar to Port Hueneme and PRFTA with respect to solar resources.

Table 11. System size and performance for cost analysis.

Combined ESTCP Installation	System Size (updated with current technology)	Annual Energy Displaced
Electric	69 kW (e)	113,220 kWh
Thermal	1555 kW(th)	21,560 therms

The life-cycle cost analysis was computed for the demonstrated technology based on the system and operational assumptions listed below:

Table 12. Assumptions for cost analysis.

System Inputs		Operational Inputs	
Cogenra Modules	144	Monthly Rent	\$0
Cogenra Equivalent Rating (W-dc)	480	PV O&M (\$/Module)	\$10.0
Cogenra STC Rating (Wp-dc)	600	Thermal O&M (\$/Module)	\$2.5
Installed Capacity (kW-dc)	69	O&M Escal. Rate	3.0%
Installed Price (\$)	915,605	Insurance Rate	0.0%
CPV- Elec Prod / Mod (KWh)	786	Insurance Escalation	0.0%
Energy Yield (AC) KWh / KWeq	1,638	Inverter 10th Yr Repair (\$/W)	0.10
PVT- Elec Prod / Mod (KWh)	786		
PVT-Thermal Prod / Mod (KWh)	3,510		
PVT-Heat Utilization (annual avg)	100%		
Boiler Efficiency	80%		
PV Performance Degradation (annual)	-0.5%		
Rate Inputs		Financial Inputs	
Electricity Price (\$/kWh)	\$0.1350	Federal Tax Rate	35%
Electric Escalation Rate (annual)	4.0%	State Tax Rate	5.8%
Thermal Price (\$/Therm)	\$0.8400	Bonus Depreciation	NO
Thermal Escalation Rate (annual)	3.0%	Fed Depreciation	MACRS
CSI Electric PBI (\$/kWh)	\$0.000	State Depreciation	MACRS
CSI Thermal PBI (\$/kWh)	\$0.303	Cost of Equity(%)	6.0%
		% of Debt	0.0%
		Interest on Debt(%)	5.0%
		Duration of Debt (Yrs)	12.0
		WACC	6.0%

The cash flow economics offered by the demonstrated technology with 25 year lifetime was developed and results are shown in the tables below. The payback for the project with the updated receiver technology is expected to be little over 5 years. This payback metric and the return on investment depend significantly on the energy usage and demand profile of the barracks and building sites. During the course of this study, it was found that the actual demand fluctuated severely depending on occupancy of the barracks. This lack of demand impacts the performance of the array, because when there is no off-take for the thermal energy generated by the solar array, the solar thermal storage tank reaches its upper temperature limit and triggers the solar array to de-track to mitigate over-heating. During de-tracking the array produces neither electricity nor solar hot water and this will in-turn impact the economics of the project.

Table 13. Financial analysis for Cogenra's rooftop solar cogeneration system.

Effective Purchase Price ¹	Typical Annual Revenue ²	Payback Period ³	Return on Net Investment	Unlevered IRR ⁴
\$238,399	\$33,393	5.1 Years	1.94x	15.4%

NOTES

1) Net price after 30% ITC tax credit, Year-1 MACRS tax impact, solar hot water rebates

2) No \$-value attributed to Carbon offset

3) After tax payback period

4) Unlevered, after-tax IRR

5) Contingent upon final site inspection and permitting

6) Assumes 40.8% total tax(Federal + State)

7) Assumes electric rate at \$0.135/kWh, 4% escalation

8) Assumes natural gas rate at \$0.84/Therm, 3% escalation

9) Assuming current consumption patterns.

System Costs & Rebates	\$	Comments
Installed Cost	915,605	Includes standard warranty
ITC Tax Credit 30%	(274,682)	Federal Incentive
SHW Rebate	(382,259)	California Solar Initiative- Thermal Incentive
Net Tax Impact	(20,265)	MACRS
Effective Purchase Price	238,399	

1st Year Revenue Streams	\$/Year	Comments
Electric Incentive	0	
Fuel	18,109	At \$0.84/Therm
Electric	15,285	At \$0.135/kWh
Carbon / RECs	0	No \$-value attributed to carbon offsets
O&M	(1,800)	Maintenance

Net Revenues / Year	\$31,593	
Payback Period (Years)	5.1	
Project Equity IRR (unlevered)	15.4%	4% annual Electricity escalation & 3% Natural gas escalation

The sensitivity of the system payback for several parameters was evaluated and shown in the table below:

Table 14. Sensitivity of system payback to various site-specific parameters.

The sensitivity analyses were computed for DNI = 1700 kWh/m² with 100% heat utilization for part-1 and with \$0.135/kWh and \$0.84/Therm for Part-2 of the table.

Payback in years		Annual Average Electric Rate, \$/kWh		
		0.100	0.135	0.150
Gas Rate \$/Therm	0.60	6.7	5.8	5.5
	0.84	5.6	5.1	4.9
	1.00	5.1	4.8	4.8

Payback in years		% Heat utilization (demand variation)			
		100%	80%	60%	50%
DNI Variation kWh/m ² -yr	1600	5.9	8.7	12.3	14.2
	1700	5.1	7.7	11.3	13.1
	1900	4.4	6.0	9.3	11.3
	2100	3.8	4.9	7.7	9.7
	2300	3.4	4.4	6.4	8.2
	2500	3.2	3.9	5.4	7.1

Following the demonstration of this project, Cogenra has developed a financing relationship with a financial partner. This enables Cogenra's technology to be implemented at DoD sites without any up-front cost, while utilizing the economic benefits of the tax credits (ITC) currently in place from the U.S. Federal Government.

If this demonstration project were contracted as a power purchase agreement (PPA) financed project, then the site would be eligible for the following discounted energy rates and savings.

1,624 KW (e+th)			
	Proposed PPA Rates	Current Energy Rates	Discount
Electric	\$0.125 / KWh	\$0.135 / KWh	7.4%
Thermal	\$0.50 / therm	\$0.84 / therm	40.5%
PPA Contract Term: 25 Years			

NOTES

1) Annual PPA escalation rates of 3% electric and 2% gas

8.0 IMPLEMENTATION ISSUES

One challenge encountered during this demonstration project was low or inconsistent hot water demand at times. We have identified several solutions for dealing with varying thermal demand, some of which are already in use in Cogenra systems. The various parameters that can be controlled to optimize the proportion of electricity and heat generation are:

- i. Flow control: Controlling the flow of the heat transfer fluid can allow for higher electricity production by running the PV cells cooler than normal.
- ii. Heat dissipation: Utilization of heat dissipation systems that can automatically turn on during times of high electrical demand or higher time of use value for electricity.
- iii. Thermal boost: The arrays can also be operated in a thermal-only mode for those times during the day when more hot water production is needed by turning the inverter off so that all the collected solar energy is converted into thermal energy.

Design Tools

Cogenra developed a set of design tools and engineering templates. These tools will significantly reduce engineering time and cost and will enable engineers with little experience with solar cogeneration technology to design and implement new projects. These tools will also enable DoD installations to utilize a wider array of contractors to design and install solar cogen systems.

The following is a list of tools that enables a developer or installer to size the solar cogeneration system based on the roof layout and to do the full design and installation. The documents need to be followed in order. All documents are available for Cogenra partners after signing an nondisclosure agreement (NDA) with Cogenra.

1. Cogenra SunPack Webinar – Overview of Product, Design, Assembly, Customer Support Resources (Hydronics Calculator, BOS Calculator, Project Plan)
2. 2.0 Configuration Guide – Determining orientation of array, proper configuration, layout
3. 2.0 Configuration Selector – Excel program
4. Calculating Design Wind Pressure – Overview for determining wind loading
5. 2.0 Wind Loading Calculator – Excel program
6. Hydronics Flow Calculator – Excel program
7. Inverter Selection Tool – Excel program
8. Electrical Calculator – Excel program
9. SunDeck Installation Guide – Install Manual
10. SunDeck Pre-CX Guide – PreCX checklist
11. SunDeck CX Guide – CX manual
12. Sundeck Maintenance Guide – Maintenance Manual
13. SunPack Templates – CAD tools for SunPack Template, rotational clearance and data

sheet

14. 2.0 Project Plan – M.O. Project Overview from Lead ID to CX

This page left blank intentionally.

APPENDIX A

POINTS OF CONTACT

Point of Contact	Organization	Phone Fax E-Mail	Role In Project
Mr. Ratson Morad	Cogenra Solar, Inc.	Phone: (650) 230-3404 Email: ratson.morad@cogenra.com	Lead Principal Investigator
Mr. Tom Santoianni	Naval Base Ventura County	Phone: (805) 982-4075 Email: tom.santoianni@navy.mil	DoD Liaison
Mr. Ed Cantor	U.S. Army PRFTA Camp Parks	Phone: (925) 875-4638 Email: Edward.j.cantor.civ@mail.mil	DoD Liaison
Dr. Jim Galvin	ESTCP	Phone: (571) 372-6397 Email: james.j.galvin.civ@mail.mil	Energy & Water Program Manager



ESTCP Office

4800 Mark Center Drive
Suite 17D08
Alexandria, VA 22350-3605
(571) 372-6565 (Phone)
E-mail: estcp@estcp.org
www.serdp-estcp.org